



PARKINS
PLASTIC MACHINERY CO.,LTD

CATALOGUE

COMPANY PROFILE	02
BJAA+SS	05
BJA2+S	06
BJA4+S	07
BJA3P+S	08
BJA4P+S	09
BJATRP-6L+S	10
BJATRP-12L+S	11
BJAF+S	12

COMPANY PROFILE

PARKINS PLASTIC MACHINERY CO., LTD. was established in 1976 under the leadership of President C.I. Lin. PARKINS has successfully developed the most comprehensive range of plastic bag sealing and cutting machines with 40 years of experiences and that makes it to be rewarded as one of the leading manufacturers in Taiwan plastic machinery industry. PARKINS' machines have been sold in over 60 countries, and received full approval from customers over the world.

Based on PARKINS' the advanced bag making concepts, we are equipped with high-quality spare parts, and advanced devices to increase product functionality; at the same time maintaining the stability and quality during bag making process. We adopt modern production management, and all parts are precision machined by sophisticated CNC equipment to ensure machine accuracy and parts interchangeability.

"PARKINS" written in Chinese as "BAI-JIU" implicates "Everlasting Century". We will uphold our principle of sustainability and keep striving for more enhanced machines and superior technical services for our valuable customers.

We manufacture a variety of bag making machines. Products including High-Speed T-shirt Bag, Perforating Bag-on-roll Garbage Bag, Bottom-Sealing Bag, Heavy-Duty Bag, Laundry-Bag, Side-Sealing Bag, Calendar Bag, EVA or PE material deposable Gloves, and etc..

Kindly refer to our website: www.parkins.com.tw for more information. Please do not hesitate to email or call us for any further questions or inquiries. We will provide our most competitive quotations and delivery time to meet your requirements and needs. We believe that you will discover the machine that surpasses your needs.

23.5°N Tropic of Cancer Solar Exploration Center

PARKINS PLASTIC MACHINERY

www.parkins.com.tw

BJAA+SS

Double-Lane Double-Servo Control
Sealing & Cutting Machine



FEATURES >>

- Equipped with double servo motor and double photo sensor.
Operating simultaneously with double line of different sizes
of printing bags and plain bags.

SPECIFICATIONS >>

MODEL	BJAA+SS 28"x 42"	BJAA+SS 32"x 48"	BJAA+SS 40"x 60"	BJAA+SS 50"x 75"
Max. Cutting Width mm (inch)	304 (12") x 2	355 (14") x 2	457 (18") x 2	584 (23") x 2
Max. Cutting Length m (inch)	1 (42")	1.2 (48")	1.5 (60")	2 (75")
Thickness (micron / sheet)	12-50	12-50	12-50	12-50
Length Tolerance mm	±1	±1	±1	±1
Production Rate (pcs / min)	max.150	max.150	max.140	max.90
AC Driving Motor (HP)	2	2	2	2
Heater Capacity (kW)	2.2	2.6	3	3.6
Power Required (kW)	9	9.4	10.4	11.4
Machine Dimensions (L*W*H cm)	415 x 155 x 140	415 x 165 x 160	475 x 185 x 160	475 x 210 x 180
Machine Weight (kg)	850	930	1190	1640
Packing Measurement (L*W*H cm)	270 x 164 x 173	270 x 173 x 173	310 x 227 x 215	310 x 227 x 215
Gross Weight (kg)	1000	1180	1490	2000

Correct specifications depend on the actual model. All specifications are subject to change without prior notice.

BJA2+S

Double Layer 4-Lane Servo Control
Sealing & Cutting Machine



FEATURES >>

- Uses servo motor for feeding, with stable sealing abilities, and fast on speed change. Easy to change bag size, and size error is permissible.
- By adjusting the connector between back feeding rollers to enable 2-lane or 4-lane production.

SPECIFICATIONS >>

MODEL	BJA2+S 28"x 42"	BJA2+S 32"x 48"	BJA2+S 40"x 60"
Max. Cutting Width mm (inch)	660 (26") or 304 (12") x 2	762 (30") or 355 (14") x 2	965 (38") or 457 (18") x 2
Max. Cutting Length m (inch)	1 (42")	1.2 (48")	1.5 (60")
Thickness (micron / sheet)	9-50	9-50	9-50
Length Tolerance (mm)	±1	±1	±1
Production Rate (pcs / min)	max.140	max.140	max.140
AC Driving Motor (HP)	2	2	2
Heater Capacity (kW)	4.2	5	5.6
Power Required (kW)	9.9	10.7	12.3
Machine Dimensions (L*W*H cm)	450 x 130 x 190	450 x 140 x 190	480 x 160 x 190
Machine Weight (kg)	1400	1600	1900
Packing Measurement (L*W*H cm)	252 x 161 x 215	252 x 173 x 215	261 x 222 x 215
Gross Weight (kg)	1650	1900	2250

Correct specifications depend on the actual model. All specifications are subject to change without prior notice.

BJA4+S

Double Layer 8-Lane Servo Control
Sealing & Cutting Machine



FEATURES >>

- Uses servo motor for feeding, with stable sealing abilities, and fast on speed change. Easy to change bag size, and size error is permissible.
- By adjusting the connector between back feeding rollers to enable 4-lane or 8-lane production


SPECIFICATIONS >>

MODEL	BJA4+S 32"x 48"	BJA4+S 40"x 60"
Max. Cutting Width mm (inch)	165 (6.5") x 8	215 (8.5") x 8
Max. Cutting Length m (inch)	1.2 (48")	1.5 (60")
Thickness (micron / sheet)	9-50	9-50
Length Tolerance mm	±1	±1
Production Rate (pcs / min)	max.140	max.140
AC Driving Motor (HP)	2	2
Heater Capacity (kW)	5	5.6
Power Required (kW)	12.7	14.3
Machine Dimensions (L*W*H cm)	530 x 140 x 190	530 x 160 x 190
Machine Weight (kg)	1900	2400
Packing Measurement (L*W*H cm)	270 x 190 x 215	285 x 222 x 215
Gross Weight (kg)	2200	2800

Correct specifications depend on the actual model. All specifications are subject to change without prior notice.

BJA3P+S

Double Layer 6-Lane Fully Automatic Servo-Control Sealing & Cutting Machine

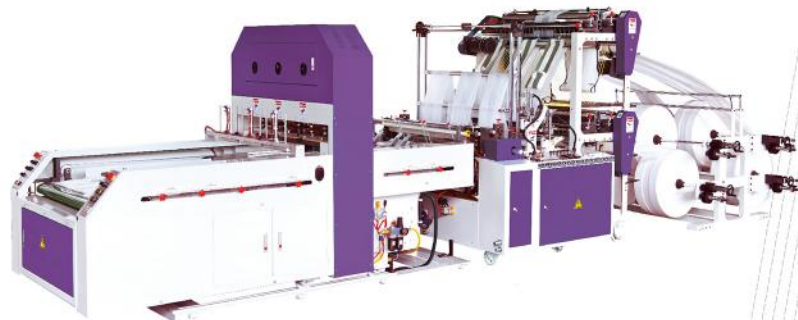

FEATURES >>

- Uses servo motor for feeding, with stable sealing abilities, and fast on speed change. Easy to change bag size, and size error is permissible.
- With auto punching unit.
- Able to produce flat bags and T-shirt bags.

SPECIFICATIONS >>

MODEL	BJA3P+S 32"	BJA3P+S 40"
Max. Cutting Width mm (inch)	228 (9") x 6	304 (12") x 6
Max. Cutting Length mm (inch)	635 (25")	635 (25")
Thickness (micron / sheet)	9-50	9-50
Length Tolerance mm	±1	±1
Production Rate (pcs / min)	max.140	max.140
Heater Capacity (kW)	5	5.8
Power Required (kW)	14.9	15.7
Main Machine Dimensions (L*W*H cm)	330 x 145 x 190	330 x 165 x 190
Sub-Machine Dimensions (L*W*H cm)	295 x 126 x 170	295 x 146 x 170
Main Packing Measurement (L*W*H cm)	230 x 173 x 215	230 x 195 x 215
Sub Packing Measurement (L*W*H cm)	310 x 136 x 200	310 x 156 x 200

Correct specifications depend on the actual model. All specifications are subject to change without prior notice.

BJA4P+S

Double Layer 8-Lane Fully Automatic Servo-Control Sealing & Cutting Machine



FEATURES >>

- Uses servo motor for feeding, with stable sealing abilities, and fast on speed change. Easy to change bag size, and size error is permissible.
- With auto punching unit.
- Able to produce flat bags and T-shirt bags.

SPECIFICATIONS >>

MODEL	BJA4P+S 32"	BJA4P+S 40"
Max. Cutting Width mm (inch)	165 (6.5") x 8	215 (8.5") x 8
Max. Cutting Length mm (inch)	635 (25")	635 (25")
Thickness (micron / sheet)	9-50	9-50
Length Tolerance mm	±1	±1
Production Rate (pcs / min)	max.140	max.140
Heater Capacity (kW)	5	5.8
Power Required (kW)	13.7	14.3
Main Machine Dimensions (L*W*H cm)	370 x 145 x 190	370 x 165 x 190
Sub-Machine Dimensions (kg)	295 x 126 x 170	295 x 146 x 170
Main Packing Measurement (L*W*H cm)	230 x 173 x 215	230 x 220 x 215
Sub Packing Measurement (kg)	310 x 136 x 200	310 x 150 x 200

Correct specifications depend on the actual model. All specifications are subject to change without prior notice.

BJATRP-6L+S

Triple Layer 6-Lane Fully Automatic Servo-Control Sealing & Cutting Machine



FEATURES >>

- Uses servo motor for feeding, with stable sealing abilities, and fast on speed change. Easy to change bag size, and size error is permissible.
- With auto punching unit.
- Able to produce flat bags and T-shirt bags.

SPECIFICATIONS >>

MODEL	BJATRP-6L+S 28"	BJATRP-6L+S 32"	BJATRP-6L+S 40"
Max. Cutting Width mm (inch)	304 (12") x 6	355 (14") x 6	457 (18") x 6
Max. Cutting Length mm (inch)	635 (25")	635 (25")	635 (25")
Thickness (micron / sheet)	9-50	9-50	9-50
Length Tolerance mm	±1	±1	±1
Production Rate (pcs / min)	max.140	max.140	max.140
Heater Capacity (kW)	6.2	7.4	8.2
Power Required (kW)	13.9	15.1	16.6
Machine Dimensions (L*W*H cm)	690 x 130 x 203	690 x 130 x 203	690 x 160 x 203
Main Machine Weight (kg)	1800	2150	2450
Main Packing Measurement (L*W*H cm)	260 x 161 x 221	260 x 173 x 221	260 x 221 x 221
Sub Machine Weight (kg)	1250	1350	1500
Sub Packing Measurement (L*W*H cm)	310 x 130 x 203	310 x 145 x 203	310 x 170 x 203

Correct specifications depend on the actual model. All specifications are subject to change without prior notice.

BJATRP-12L+S

Triple Layer 12-Lane Fully Automatic Servo-Control Sealing & Cutting Machine

SPECIFICATIONS >>

MODEL	BJATRP-12L+S 32"	BJATRP-12L+S 40"
Max. Cutting Width mm (inch)	165 (6.5") x 4	203 (8") x 4
Max. Cutting Length mm (inch)	635 (25")	635 (25")
Thickness (micron / sheet)	9-50	9-50
Length Tolerance mm	±1	±1
Production Rate (pcs / min)	max.140	max.140
Heater Capacity (kW)	7.4	8.2
Power Required (kW)	18.1	19.6
Machine Dimensions (L*W*H cm)	910 x 130 x 203	910 x 160 x 203
Main Machine Weight (kg)	2500	2900
Main Packing Measurement (L*W*H cm)	270 x 173 x 221	270 x 221 x 221
Sub Machine Weight (kg)	1500	1700
Sub Packing Measurement (L*W*H cm)	306 x 145 x 197	306 x 170 x 197

Correct specifications depend on the actual model. All specifications are subject to change without prior notice.

FEATURES >>

- Uses servo motor for feeding, with stable sealing abilities, and fast on speed change. Easy to change bag size, and size error is permissible.
- With auto punching unit.
- Able to produce flat bags and T-shirt bags.




BJAF+S

No Tension Type Servo Control Heavy
Duty Bag Making Machine

FEATURES >>

- When the bag thickness is over 200micron., a cooling conveyor is needed to improve production speed.
- Bag durability and seal is ensured since sealing and cutting are done simultaneously.

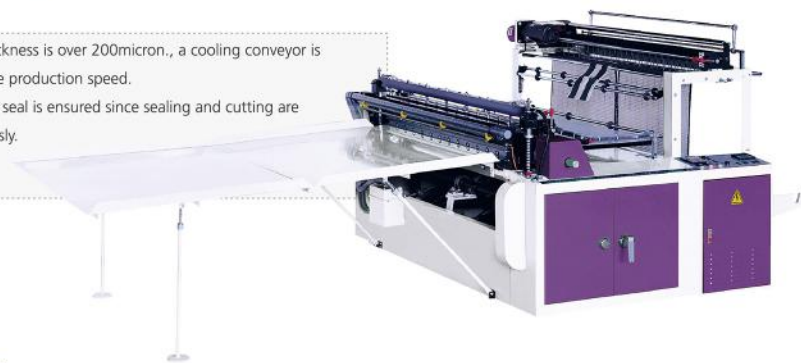

SPECIFICATIONS >>

MODEL	BJAF+S 28"x 42"	BJAF+S 32"x 48"	BJAF+S 40"x 60"	BJAF+S 50"x 75"
Max. Cutting Width mm (inch)	660 (26")	762 (30")	965 (38")	1.2m (48")
Max. Cutting Length m (inch)	1 (42")	1.2 (48")	1.5 (60")	1.9 (75")
Thickness (micron / sheet)	30-200	30-200	30-200	30-200
Length Tolerance mm	±1	±1	±1	±1
Production Rate (pcs / min)	max.140	max.140	max.140	max.90
AC Driving Motor (HP)	2	2	2	2
Heater Capacity (kW)	4.2	4.6	5.7	7.4
Power Required (kW)	9	9.4	12	13.6
Machine Dimensions (L*W*H cm)	400 x 120 x 155	400 x 130 x 155	450 x 150 x 195	400 x 175 x 195
Machine Weight (kg)	850	1000	1400	1600
Packing Measurement (L*W*H cm)	215 x 145 x 175	215 x 166 x 175	215 x 190 x 215	215 x 222 x 215
Gross Weight (kg)	1050	1250	1650	1900

MODEL	BJAF+S 60"x 90"	BJAF+S 70"x 118"	BJAF+S 80"x 196"	BJAF+S 100"x 196"
Max. Cutting Width m (inch)	1.5 (58")	2 (68")	2 (77")	2.5 (96")
Max. Cutting Length m (inch)	2.2 (90")	3 (118")	5 (196")	5 (196")
Thickness (micron / sheet)	30-200	50-200	50-200	50-200
Length Tolerance mm	±1	±1.5	±1.5	±1.5
Production Rate (pcs / min)	max.60	max.30	max.25	max.20
AC Driving Motor (HP)	2	3	3	3
Heater Capacity (kW)	8.2	9	10.4	14.8
Power Required (kW)	14.4	16	15.4	19.8
Machine Dimensions (L*W*H cm)	450 x 200 x 195	650 x 255 x 195	650 x 280 x 195	650 x 330 x 195
Machine Weight (kg)	1800	2100	2400	2800
Packing Measurement (L*W*H cm)	215 x 254 x 215	M (S) : 200 (210) x 275 x 215	M (S) : 200 (220) x 300 x 215	M (S) : 200 (230) x 350 x 215
Gross Weight (kg)	2100	2400	2700	3200

Correct specifications depend on the actual model. All specifications are subject to change without prior notice.



PARKINS
PLASTIC MACHINERY CO.,LTD
百久塑膠機械有限公司

嘉義縣水上鄉回歸村北回123號

NO.123 Pei Hui, Hui Kuei Village, Shui Shang Township, Chiayi County, Taiwan.

TEL:+886-5-2358505, 2359505, 2356586 FAX:+886-5-2359463

E-mail: pks8989@ms12.hinet.net / bj8899@ms39.hinet.net

<http://www.parkins.com.tw>

